


L BAND TDMA MESH (ADHOC) DATA LINK

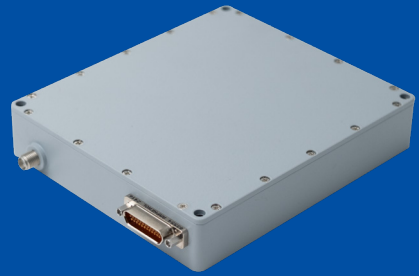

GENERAL DESCRIPTION

L Band TDMA MESH (ADHOC) Data Link is a compact data link based on TDMA communication algorithm, enabling the use of both point-point and point-multipoint communication.

The system can be used for applications where communication network is established. Compact size and low power consumption allows terminals to be used in many platforms including mini, midi and tactical UAVs.

The system incorporates SDR modem in which advanced modulation techniques are used for improved performance and spectrum utilization. AES-256 encryption and spread spectrum techniques like FHSS or DSSS are also offered as an option.

The system has relay capability for establishing mesh networks. Data rate can be adjusted up to 10 Mbps manually or automatically depending on the nature of the application.

TDM data links can form ad-hoc networks. Each participant can automatically join, rejoin or leave network. Time slot reallocation can be made in order to provide high bandwidth for a specific participant.

BENEFITS

Mission Critical Applications;

- Swarm UAV / UWA / UGA
- Mesh Network Communication
- Reliable Time Synchronization
- Range / Position Calculation
- Convoy connectivity
- Joint Picture / Command and Control
- Relay Capability
- Improved Communication Ranges

EXTREME CONDITION CIVIL APPLICATIONS

Mining, oil and gas, harbor and ports, agriculture, utilities and in all extreme conditions uninterrupted connectivity.

- Integrated and optimized operations
- Higher productivity
- Reliable command and control
- Autonomous and joint operations' endurance.

L BAND TDMA MESH (ADHOC) DATA LINK



Weight (g)

370

Dimensions (cm)

10.2 x 11.6 x 2.2

Frequency

L Band

RF Output Power

10 W

Data Rate

Up to 10 Mbps

Modulation

CPFSK / MSK / PSK

ECCM (Optional)

FHSS or DSSS

FEC

Reed Solomon (RS) and Convolutional,
LDPC (O)

Data Encryption

AES 256 (Optional)

Data Interfaces

Ethernet, RS 422/485, RS 232

Antenna Interface

SMA

Operating Voltage

28 V (24 - 32 V)

Power Consumption

15 W Average; 30 W Max.

Environmental Tests

MIL-STD-810G

EMI / EMC

MIL-STD-461F

KEY SPECIFICATIONS

- High Efficiency
- Light Weight
- Compact Size
- Easy Integration
- Point-multipoint Communication
- Automatic Networking
- Up to 10 Mbps Data Rate
- Full mesh network capable
- Swarm Capability
- Dynamic and efficient route planning
- Relay mechanism between mesh nodes
- Self-forming and Self-healing structure
- 10 Mbit/s total throughput capacity



With Autotracking Antenna System,
the range can be more than 200 km.

TUALCOM ELEKTRONİK A.Ş.

+90 (312) 485 22 85

info@tualcom.com.tr

www.tualcom.com.tr



© 2021 TUALCOM; The information contained herein is subject to change without notice. TUALCOM A.Ş. cannot be held responsible for this and no liability is accepted for any errors or omissions.